
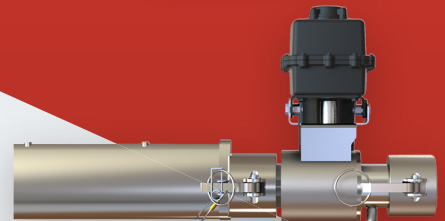

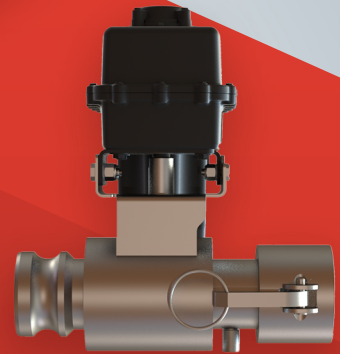
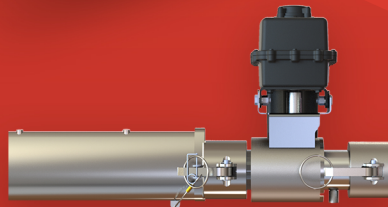
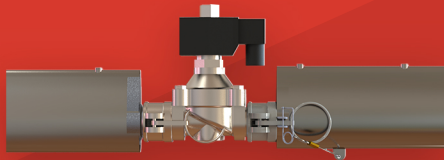


TRANSLAND BOOM SHUT-OFF KITS

*Run Sensitive Jobs
with Confidence*

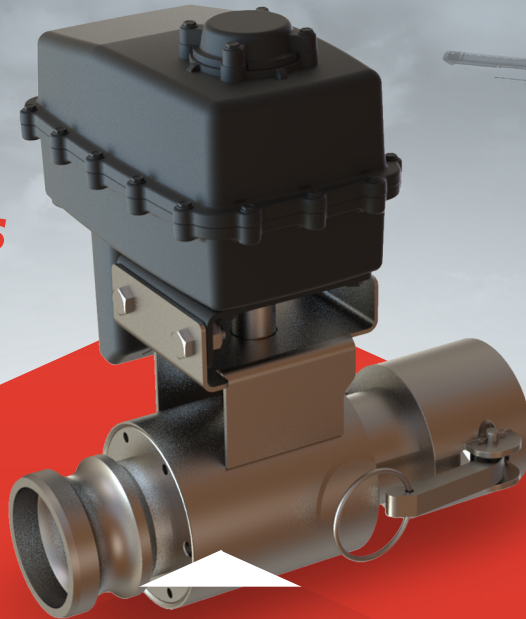


Compact Design reduces drag and effect on spray pattern.

Kits for 50% or 60% Shut-Off

- ✓ **Weldless Stainless Steel and Aluminum Boom options**
- ✓ **Options to include full right shut-off available**
- ✓ **Available for Thrush and Air Tractor aircraft**

BOOM SHUT OFF KITS

**50% and 60% Shut-Off Kits
With Right Shut-Off**



Kits include: 2 Long and 2 Short Booms in material selected. Electrical kit with Valve, Cables, and Control Panel. Electrical kit with RH Valve and Cables.



AT-502

Air Tractor

24724 50% Boom Kit, & RH Shut-Off, Alum, AT-502

24725 60% Boom Kit, & RH Shut-Off, Alum, AT-502

54724 50% Boom Kit, & RH Shut-Off, SST, AT-502

54725 60% Boom Kit, & RH Shut-Off, SST, AT-502

AT-602

Air Tractor

24726 50% Boom Kit, & RH Shut-Off, Alum, AT-602

24727 60% Boom Kit, & RH Shut-Off, Alum, AT-602

54726 50% Boom Kit, & RH Shut-Off, SST, AT-602

54727 60% Boom Kit, & RH Shut-Off, SST, AT-602

AT-802

Air Tractor & Thrush

24728 50% Boom Kit, & RH Shut-Off, Alum, AT-802

24729 60% Boom Kit, & RH Shut-Off, Alum, AT-802

54728 50% Boom Kit, & RH Shut-Off, SST, AT-802

54729 60% Boom Kit, & RH Shut-Off, SST, AT-802

510

Thrush

24730 50% Boom Kit, & RH Shut-Off, Alum, Thrush 510

24731 60% Boom Kit, & RH Shut-Off, Alum, Thrush 510

54730 50% Boom Kit, & RH Shut-Off, SST, Thrush 510


54731 60% Boom Kit, & RH Shut-Off, SST, Thrush 510

All % Shut-Off Kits include a pancake valve (55051) with a standard operating pressure of 45psi or below. If pressures exceeding 45psi are required, please notify your dealer when ordering a shut-off kit. The pancake valve will be switched to a ball valve (55052) capable of accommodating higher pressures.



BOOM SHUT OFF KITS

50% and 60% Shut-Off Kits
No Right Shut-Off



Kits include: Long and Short Boom in material selected. Electrical kit with Valve, Cables, and Control panel.



AT-502

24732 50% Boom Kit, Alum, AT-502
24733 60% Boom Kit, Alum, AT-502

Air Tractor

51133 50% Boom Kit, SST, AT-502
54733 60% Boom Kit, SST, AT-502

AT-602

24734 50% Boom Kit, Alum, AT-602
24735 60% Boom Kit, Alum, AT-602

Air Tractor

54734 50% Boom Kit, SST, AT-602
54735 60% Boom Kit, SST, AT-602

AT-802

24736 50% Boom Kit, Alum, AT-802
24737 60% Boom Kit, Alum, AT-802

Air Tractor & Thrush

55270 50% Boom Kit, SST, AT-802
54737 60% Boom Kit, SST, AT-802

510

24738 50% Boom Kit, Alum, Thrush 510
24739 60% Boom Kit, Alum, Thrush 510

Thrush

54738 50% Boom Kit, SST, Thrush 510
54739 60% Boom Kit, SST, Thrush 510

All % Shut-Off Kits include a pancake valve (55051) with a standard operating pressure of 45psi or below. If pressures exceeding 45psi are required, please notify your dealer when ordering a shut-off kit. The pancake valve will be switched to a ball valve (55052) capable of accommodating higher pressures.




BOOM SHUT OFF KITS

Right Hand Shut-Off Kits



Kits include: 2 Booms in material selected. Electrical kit with RH Valve, Cables, and Control Panel.

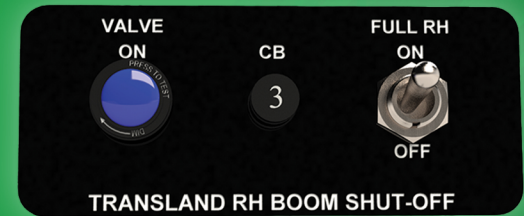

AT-502

24740 Boom Kit W/Right Shut-Off, Alum, AT-502

Air Tractor

54740 Boom Kit W/Right Shut-Off, SST, AT-502

AT-602

24741 Boom Kit W/Right Shut-Off, Alum, AT-602

Air Tractor

54741 Boom Kit W/Right Shut-Off, SST, AT-602

AT-802

24742 Boom Kit W/Right Shut-Off, Alum, AT-802

Air Tractor & Thrush

54742 Boom Kit W/Right Shut-Off, SST, AT-802

510

24743 Boom Kit W/Right Shut-Off, Alum, Thrush 510

Thrush


54743 Boom Kit W/Right Shut-Off, Alum, Thrush 510

Right-hand shut-off kits use a ball valve that can accommodate all pressure ranges.

BOOM SHUT OFF KITS

Existing Boom Kits

(Designed for customers who **DO NOT** require booms)



Kits include: 50% Valve and Electrical kit with RH Valve, Cables, and Control Panel.



AT-502

Air Tractor & Thrush

24744 50% & RH Shut-Off Kit, for an Existing Boom, Aluminum, AT-502/Thrush 510

54744 50% & RH Shut-Off Kit, for an Existing Boom, Stainless Steel, AT-502/Thrush 510

AT-602/802

Air Tractor & Thrush

24745 50% & RH Shut-Off Kit, for an Existing Boom, Aluminum, AT-602/802/Thrush 660

54745 50% & RH Shut-Off Kit, for an Existing Boom, Stainless Steel, AT-602/802/Thrush 660

No Right Hand



Air Tractor & Thrush


24746 50% Shut-Off Kit, for an Existing Boom, Aluminum, AT-502/602/802/Thrush

No Right Hand

Air Tractor & Thrush

54746 50% Shut-Off Kit, for an Existing Boom, Stainless Steel, AT-502/602/802/Thrush

Right Hand Only



Air Tractor & Thrush

53057 Right-Hand Shut-Off Only Kit, for an Existing Boom, Fits a 2" Boom

53056 Right-Hand Shut-Off Only Kit, for an Existing Boom, Fits a 2.5" Boom

All % Shut-Off Kits include a pancake valve (55051) with a standard operating pressure of 45psi or below. If pressures exceeding 45psi are required, please notify your dealer when ordering a shut-off kit. The pancake valve will be switched to a ball valve (55052) capable of accommodating higher pressures.